

FIG. 1



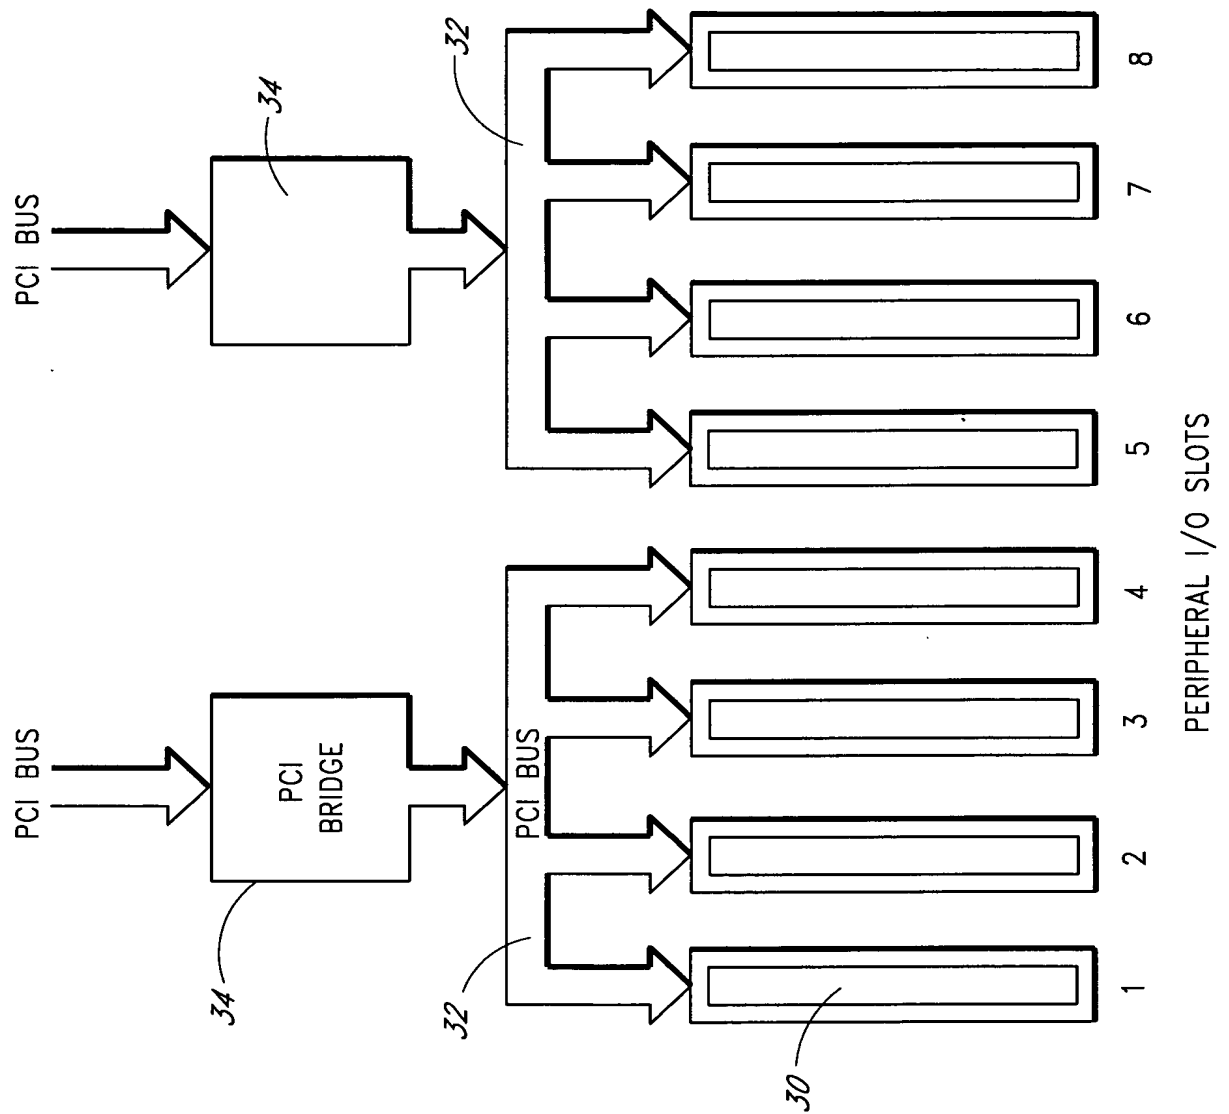



FIG. 2

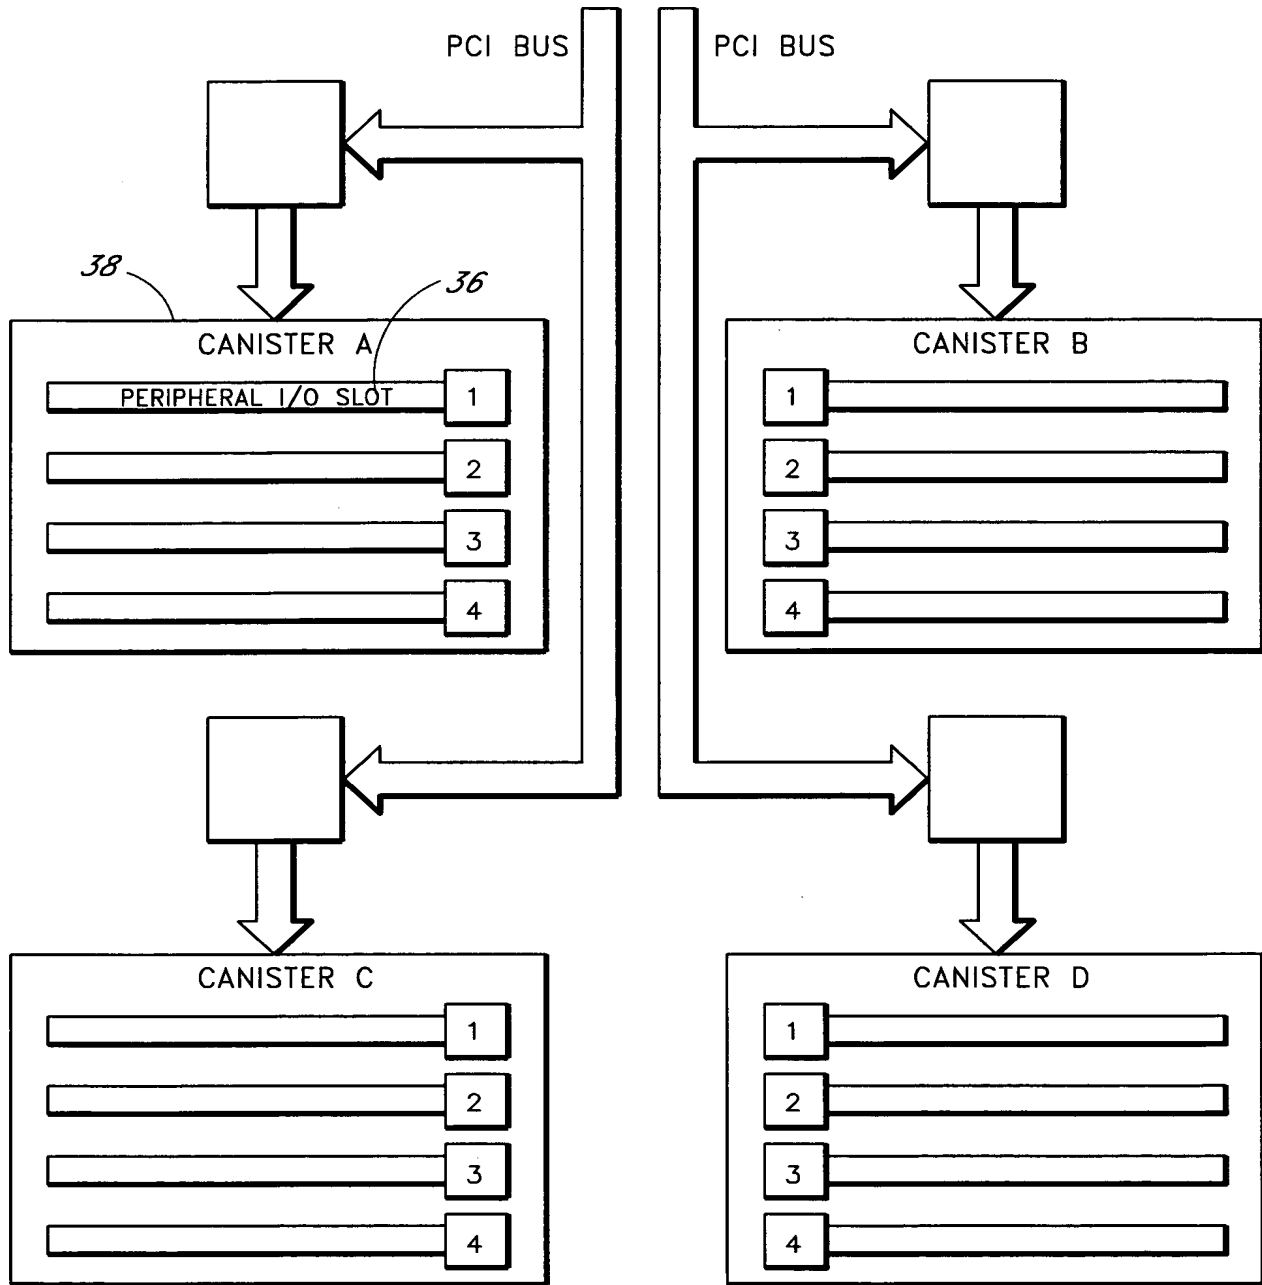


*FIG. 3*

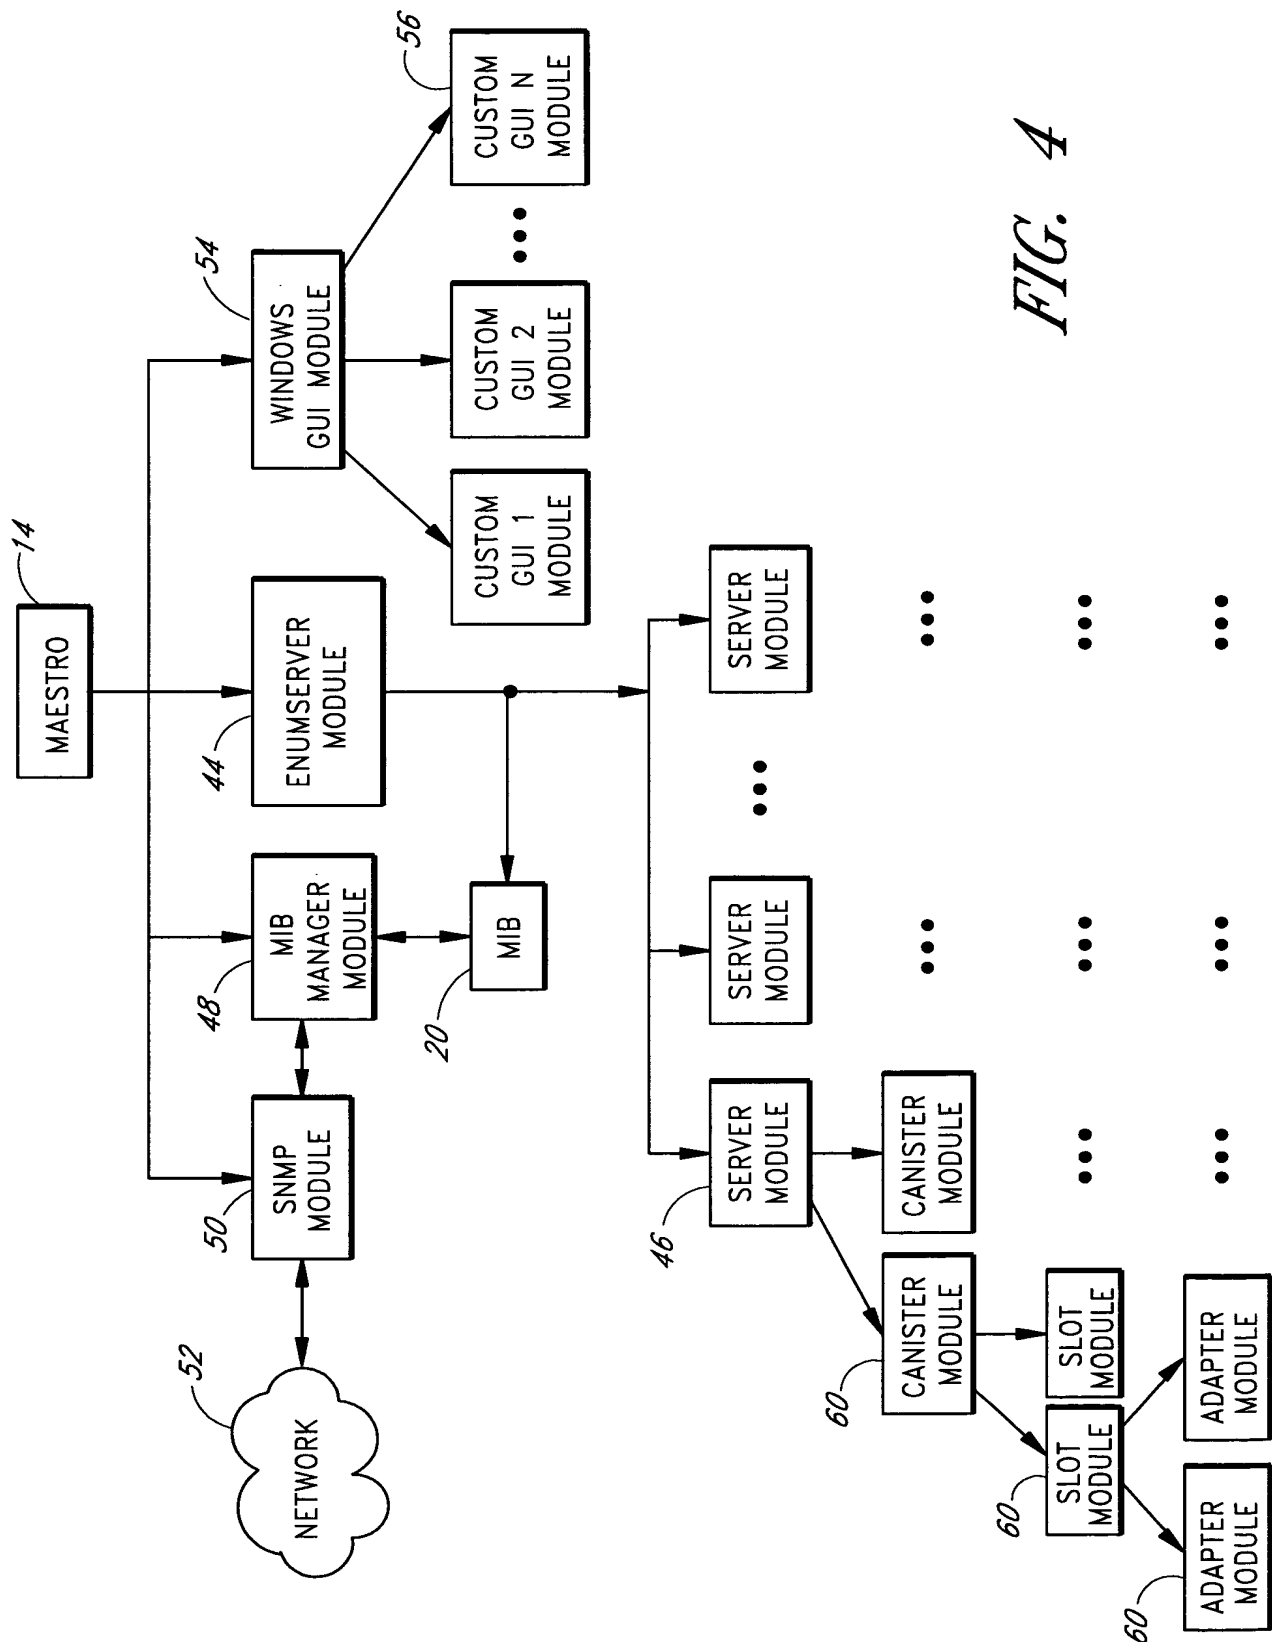

*FIG. 4*

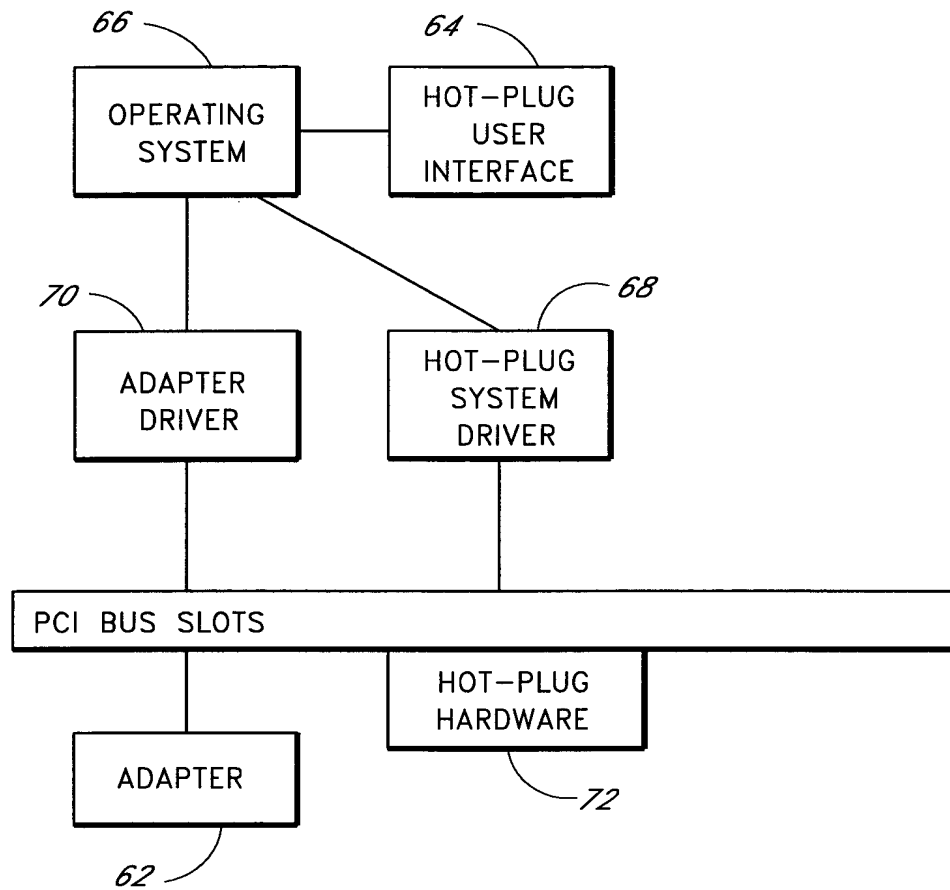

*FIG. 5*

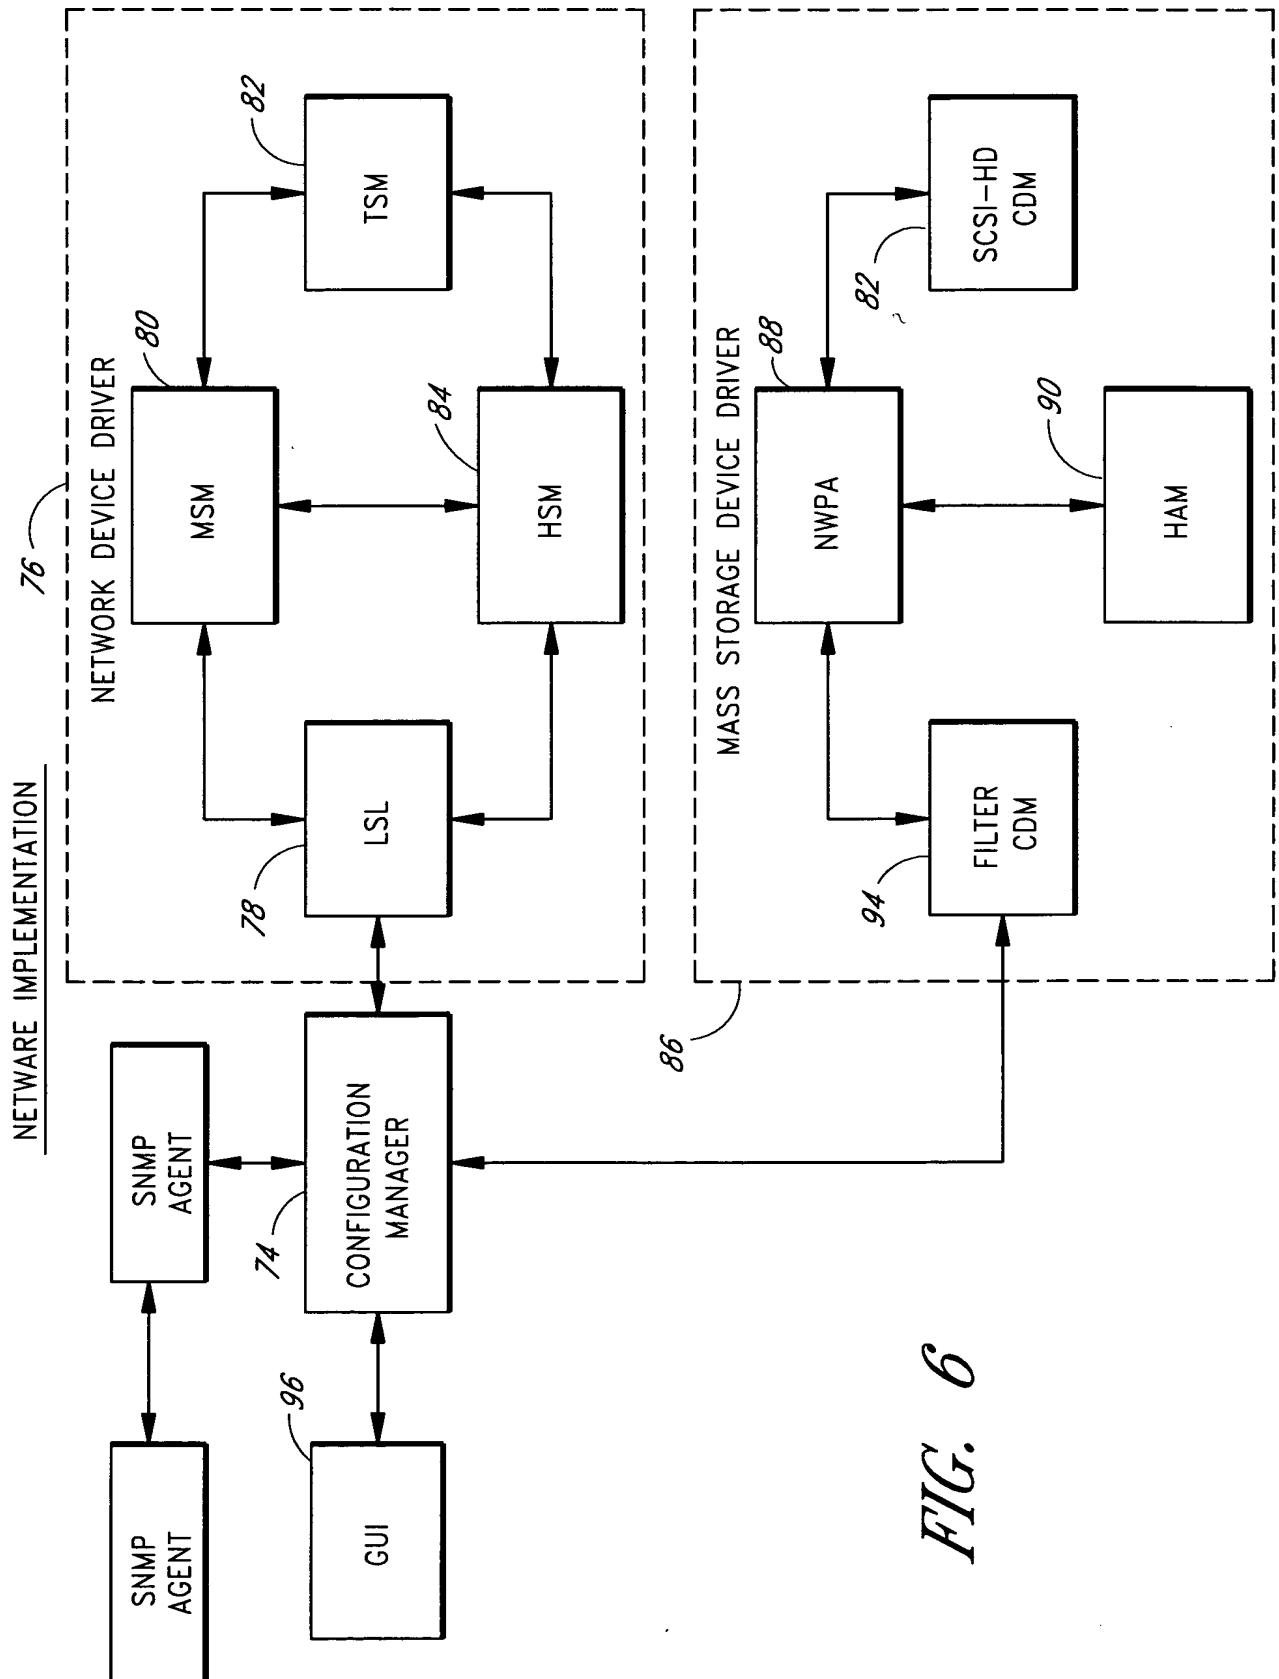


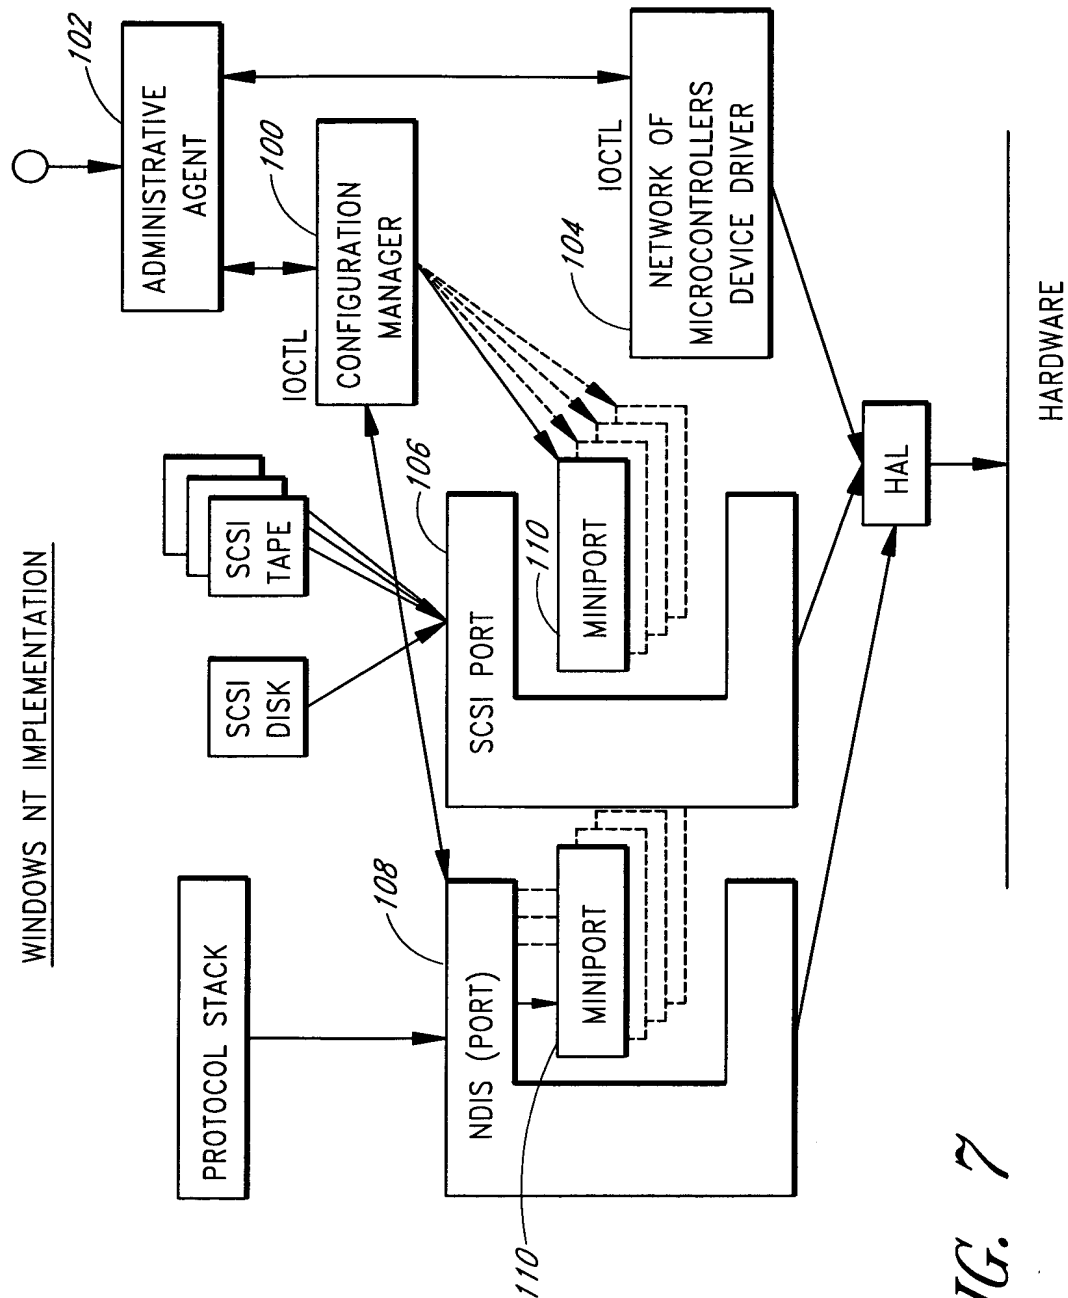


FIG. 7


HOT SWAP



*FIG. 8*

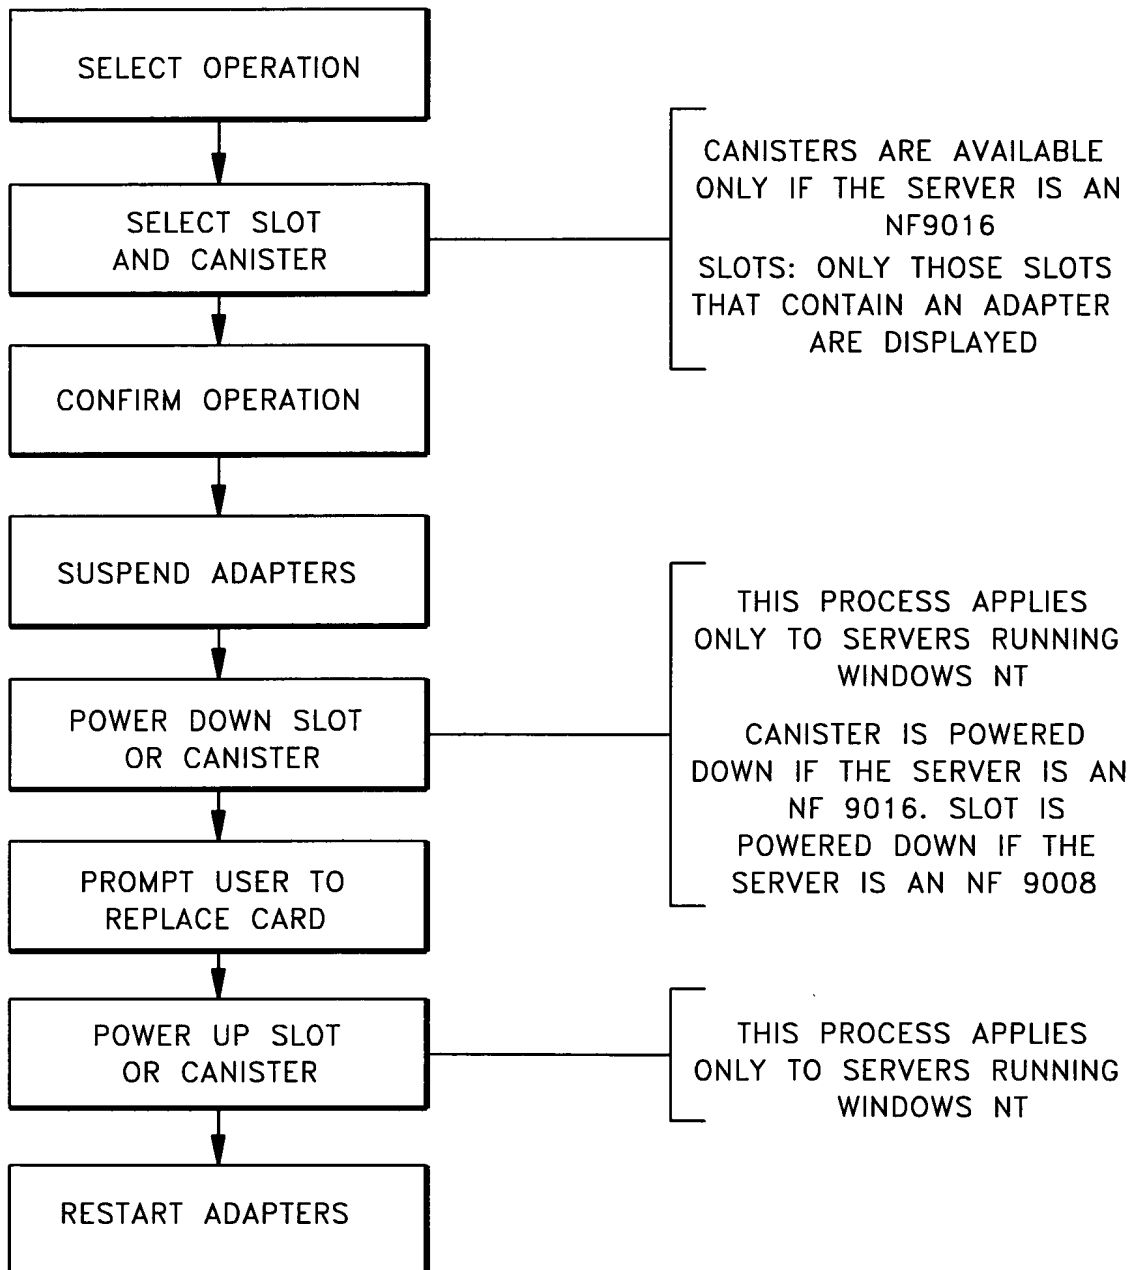


HOT ADD (NF-9008/NETWARE)

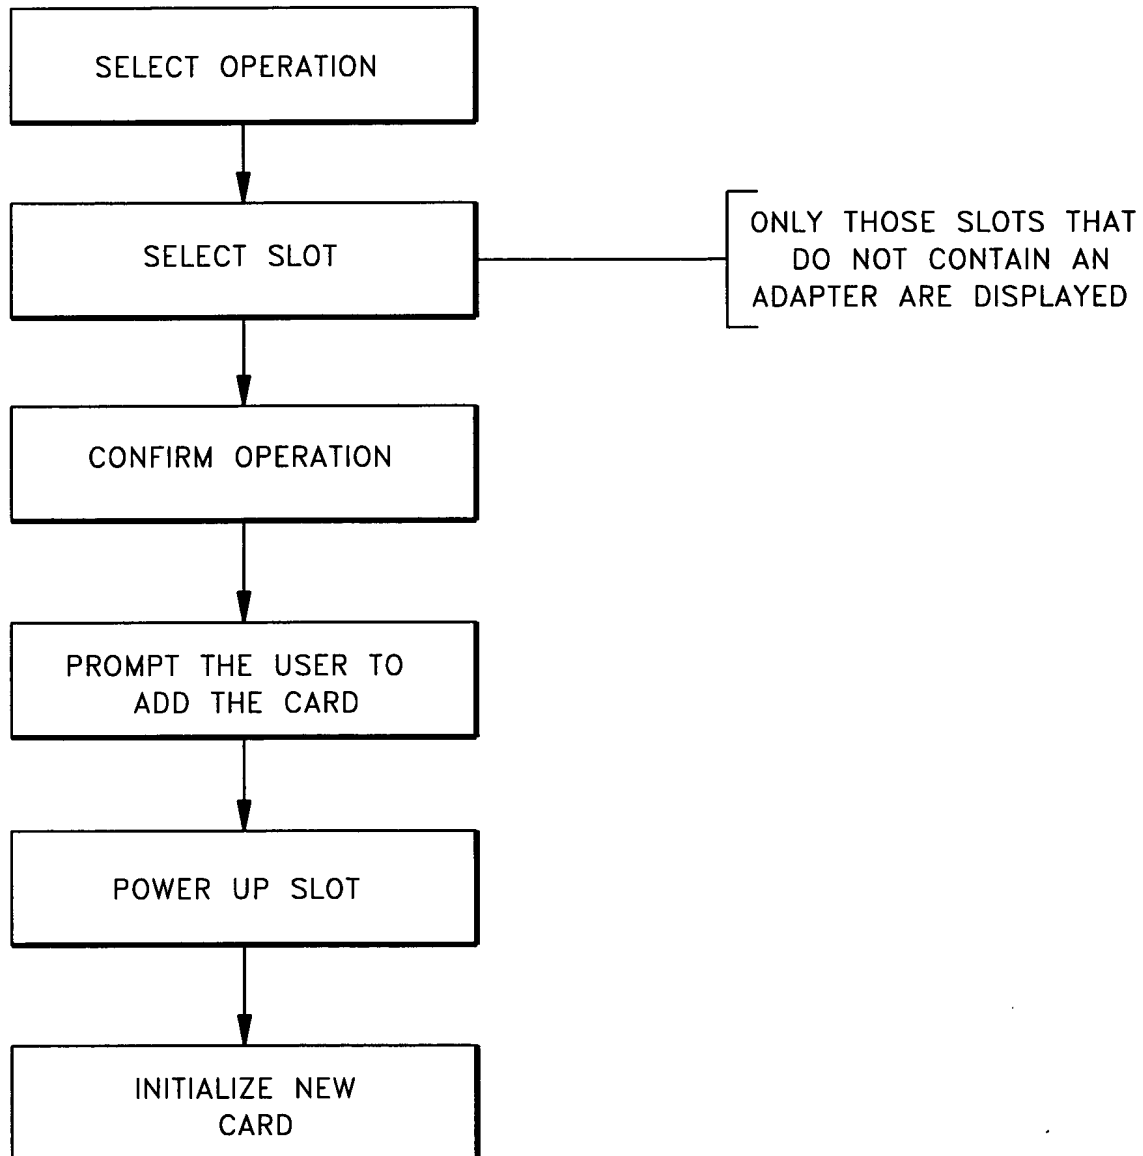

*FIG. 9*

10/32

HOT ADD (NF-9016/NETWARE)

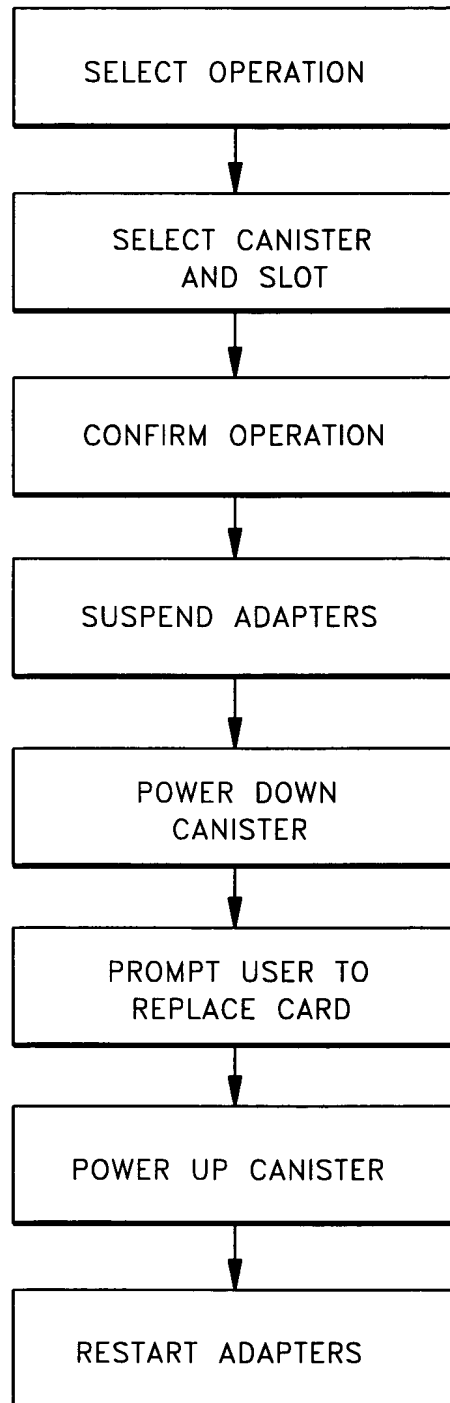

*FIG. 10*

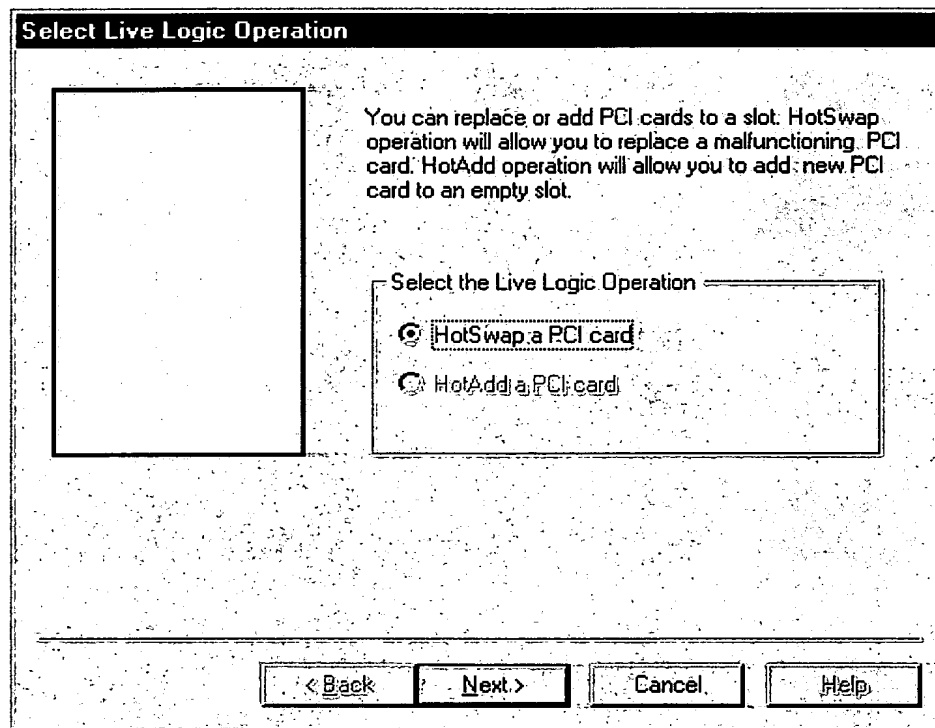


FIG. 11

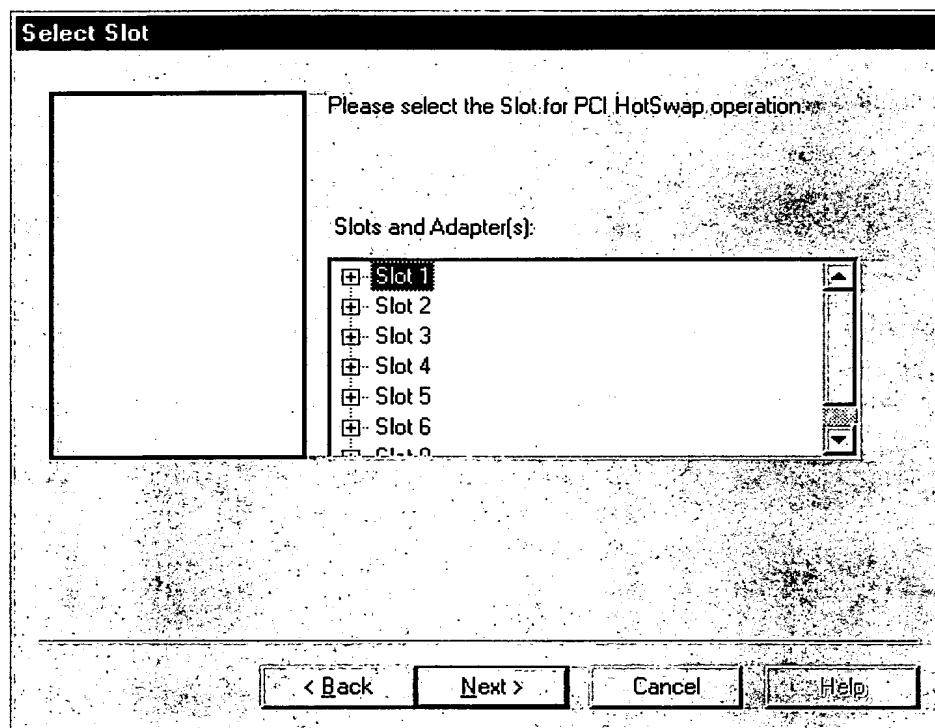


FIG. 12

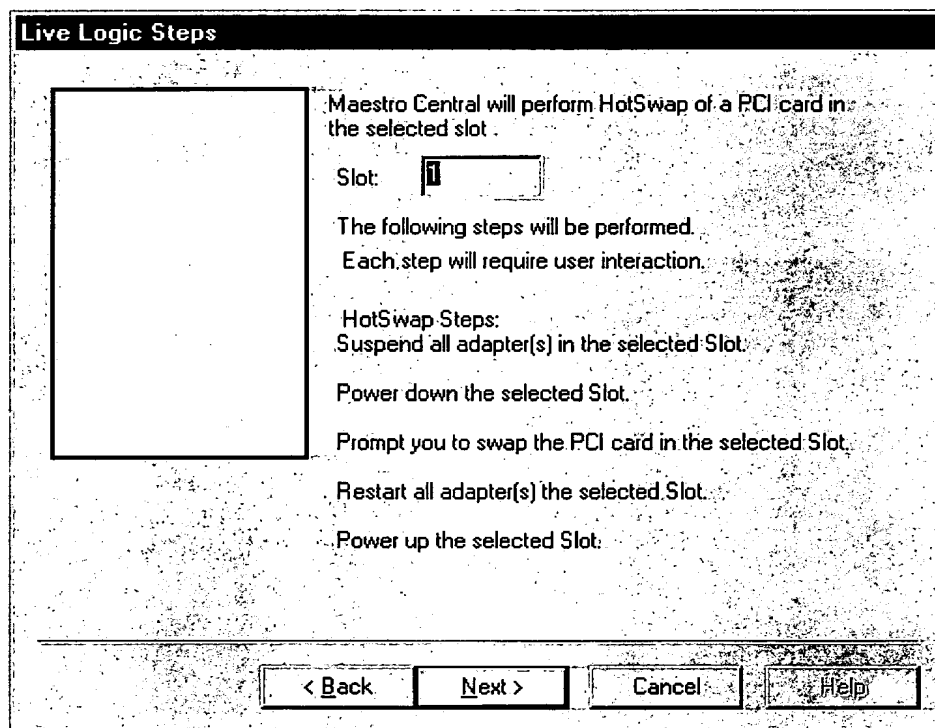


FIG. 13

BEST AVAILABLE COPY

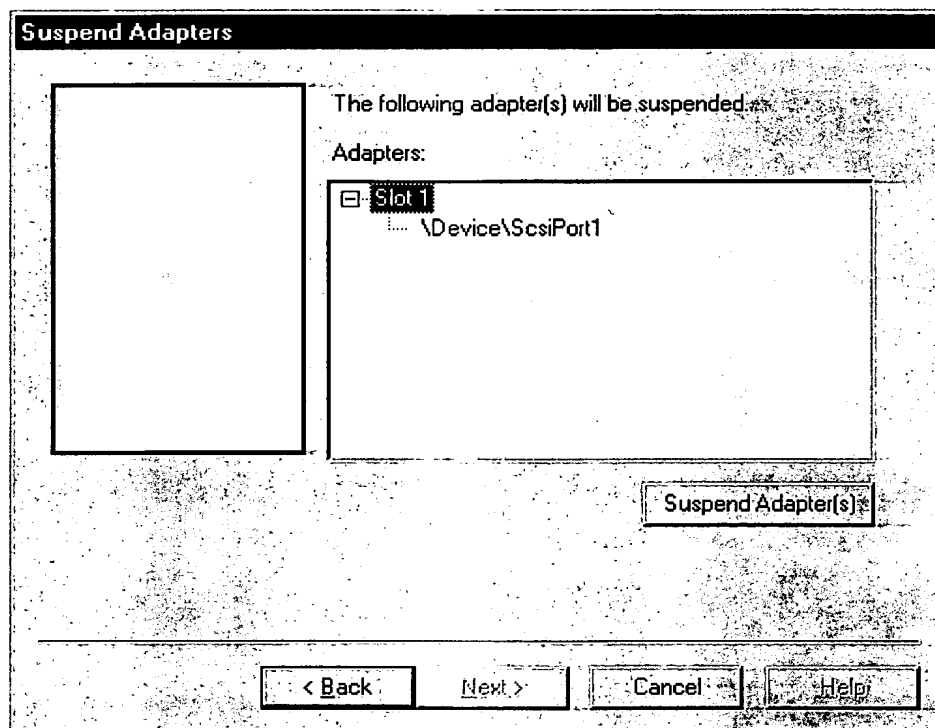


FIG. 14

BEST AVAILABLE COPY

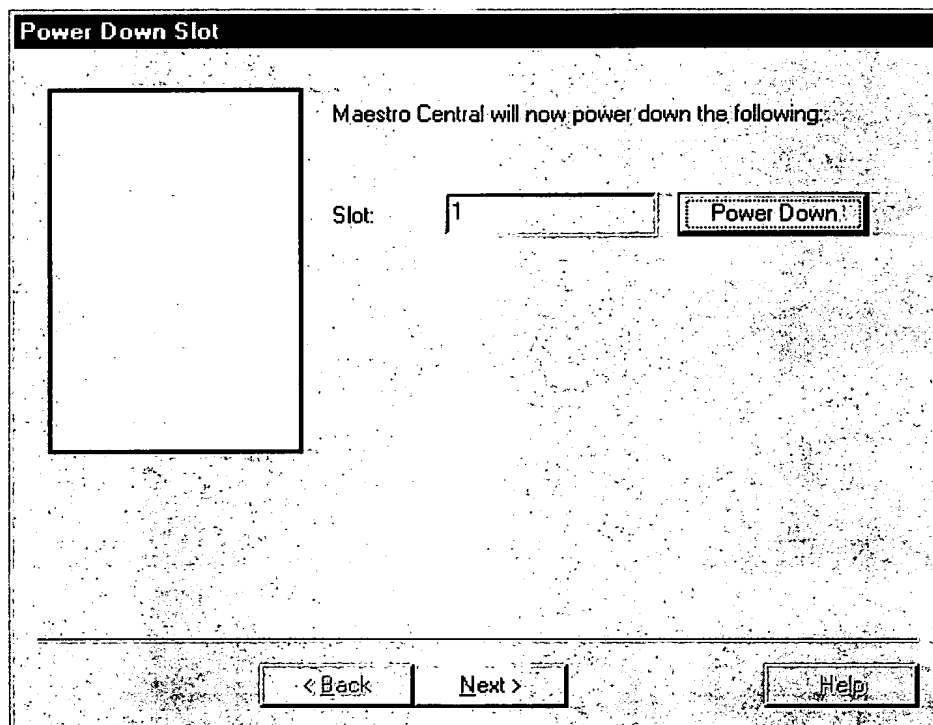


FIG. 15

BEST AVAILABLE COPY

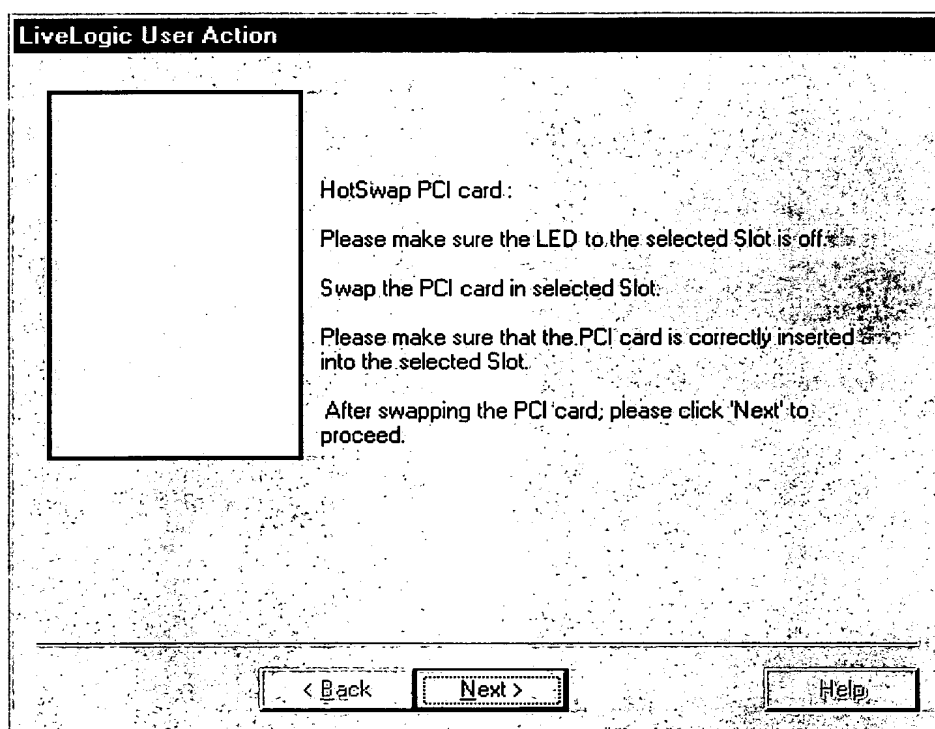


FIG. 16



BEST AVAILABLE COPY

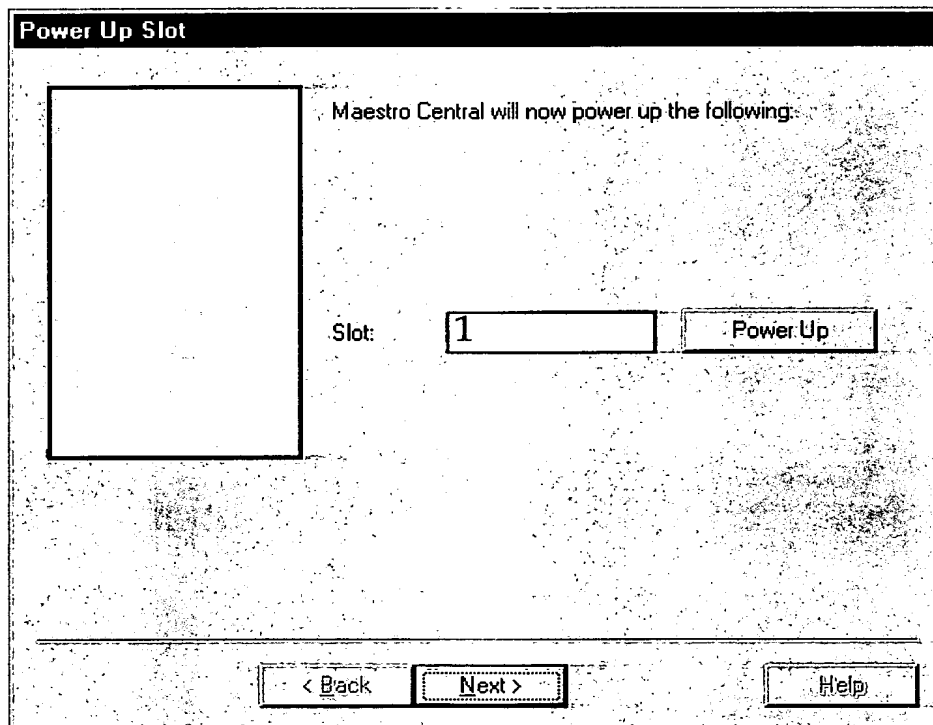


FIG. 17

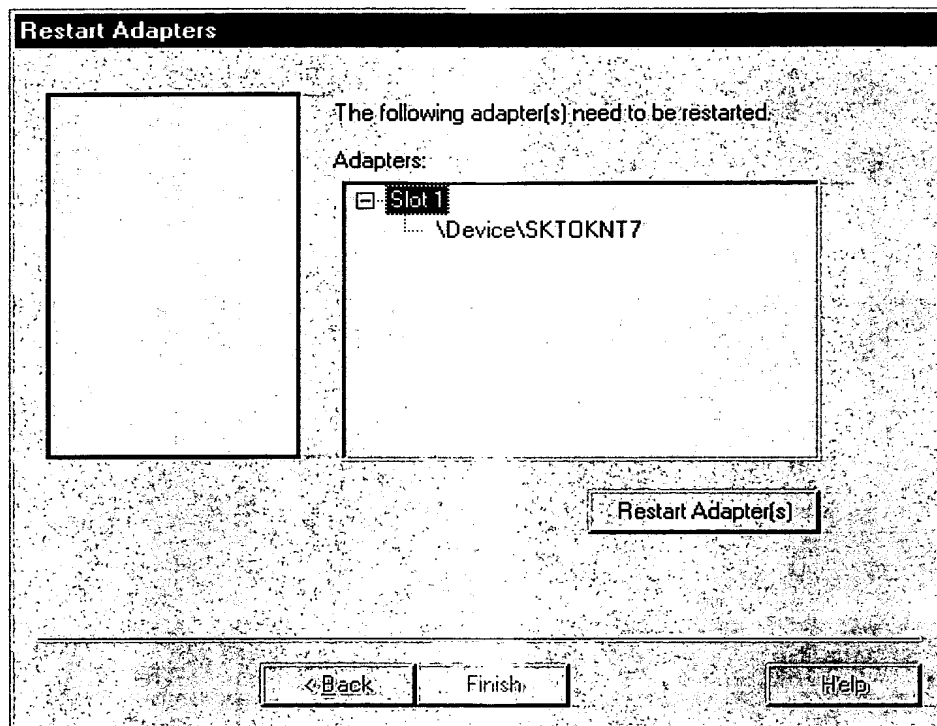


FIG. 18

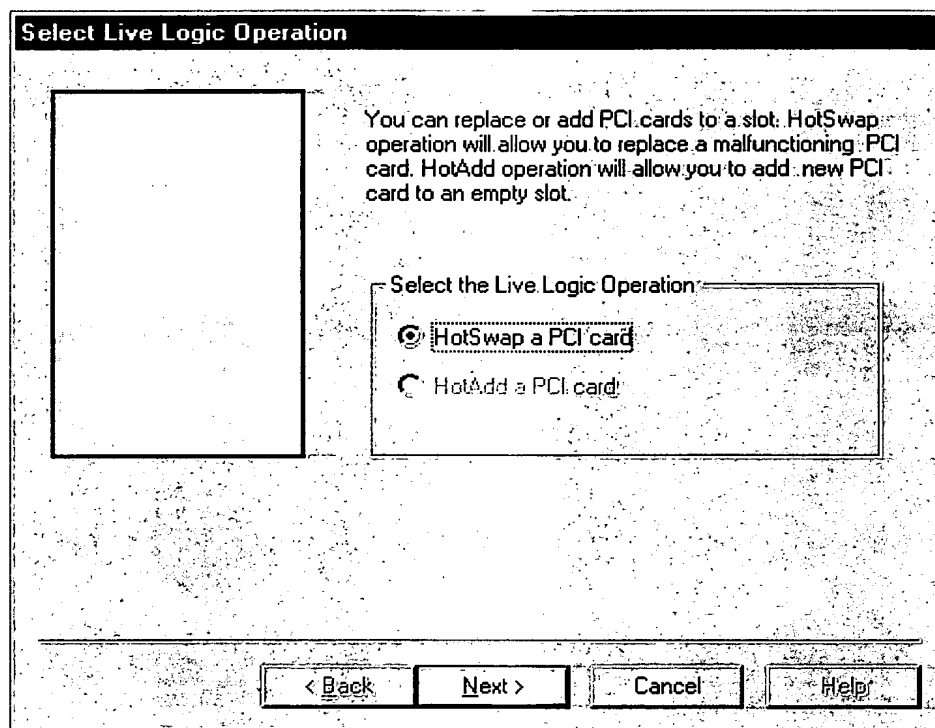


FIG. 19

BEST AVAILABLE COPY

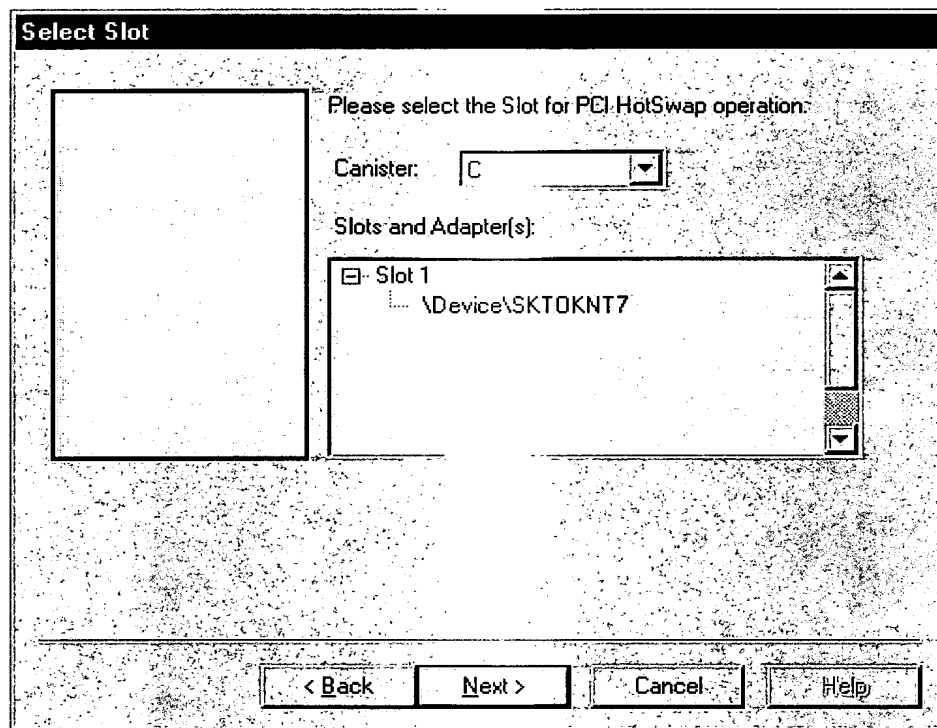


FIG. 20

BEST AVAILABLE COPY

The screenshot shows a software window titled "Live Logic Steps". On the left is a large, empty rectangular box. To the right of this box, the text reads: "Maestro Central will perform HotSwap of a PCI card in the selected slot in this Canister". Below this, there are two input fields: "Slot:" followed by a box containing the number "1", and "Canister:" followed by a box containing a small icon of a canister. Further down, the text states: "The following steps will be performed:" and "Each step will require user interaction:". This is followed by a section titled "HotSwap Steps:" which lists the following steps: "Suspend the adapter(s) in the Canister.", "Power down the Canister.", "Prompt you to swap the PCI card in the selected Slot.", "Power on Canister.", and "Restart the adapter(s) in the selected Slot.". At the bottom of the window, there are four buttons: "< Back", "Next >", "Cancel", and "Help".

FIG. 21

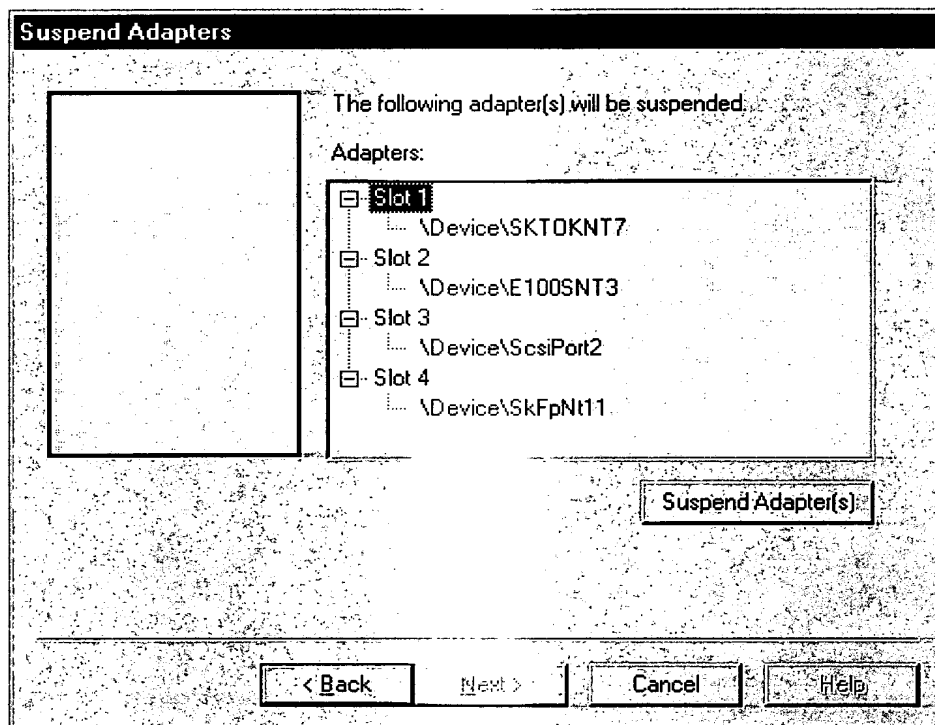


FIG. 22

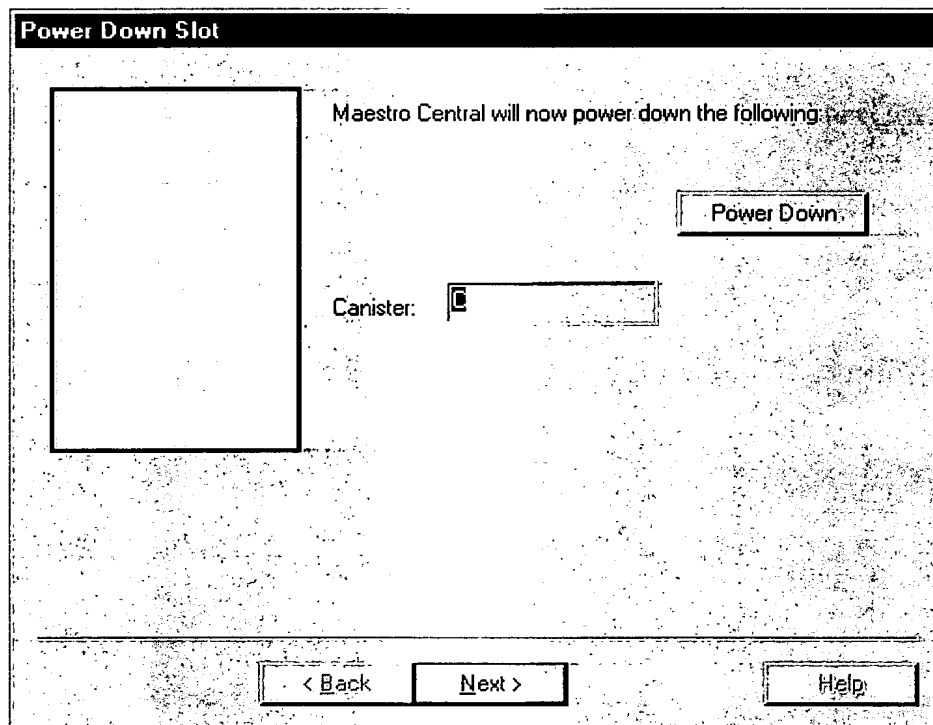


FIG. 23

BEST AVAILABLE COPY

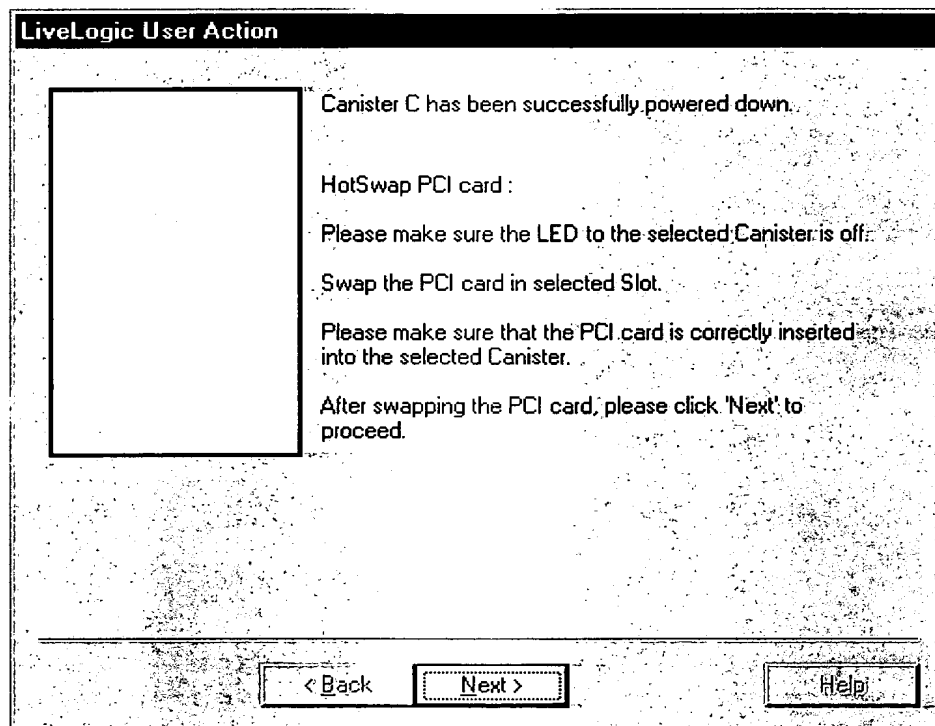


FIG. 24



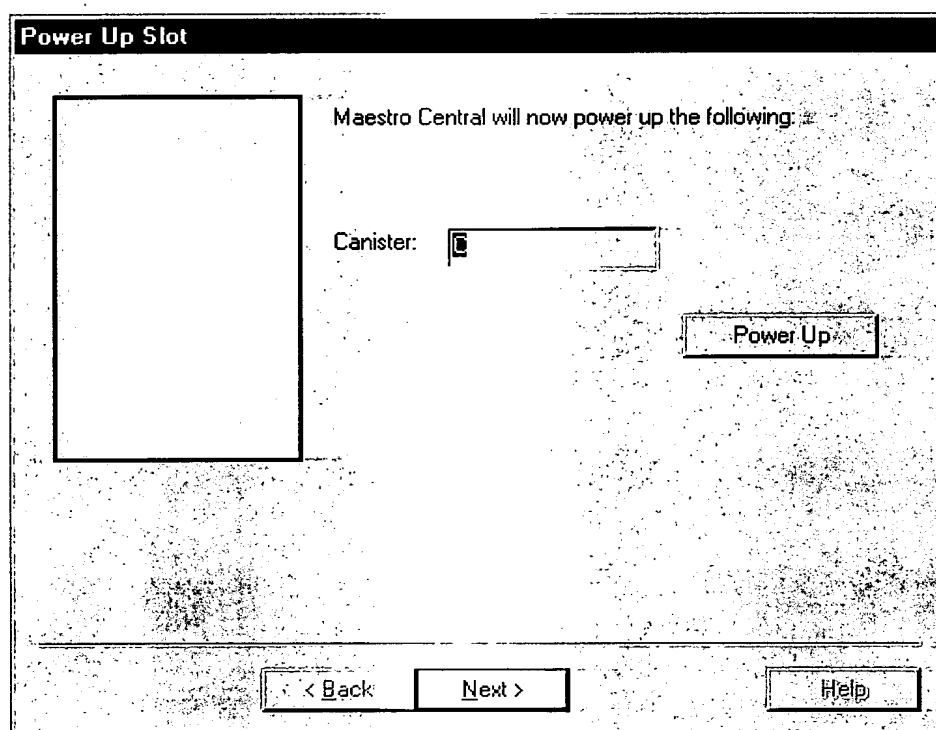


FIG. 25

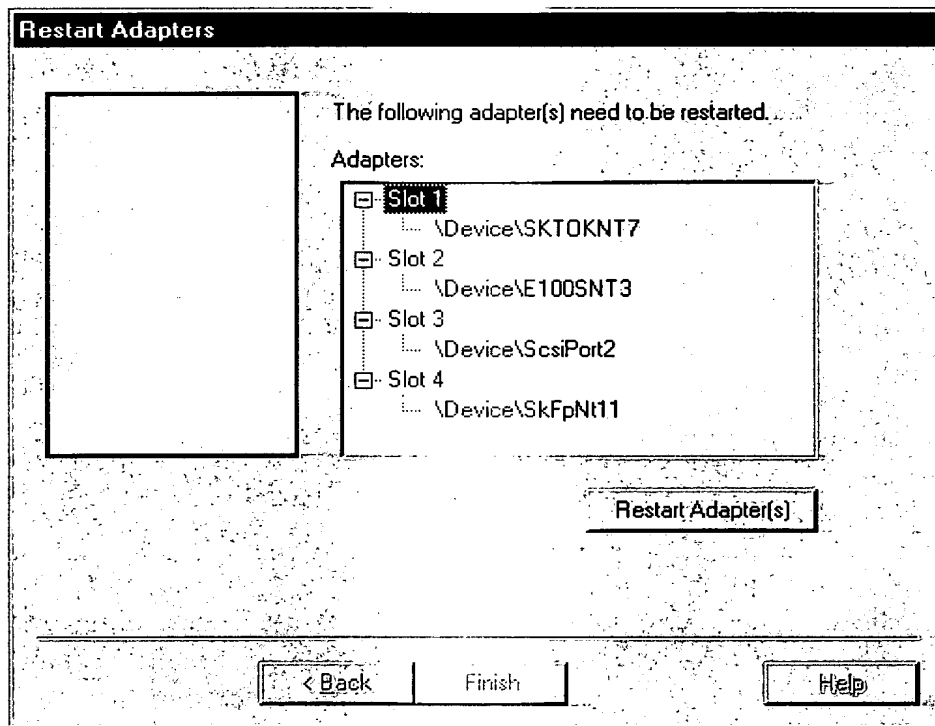


FIG. 26

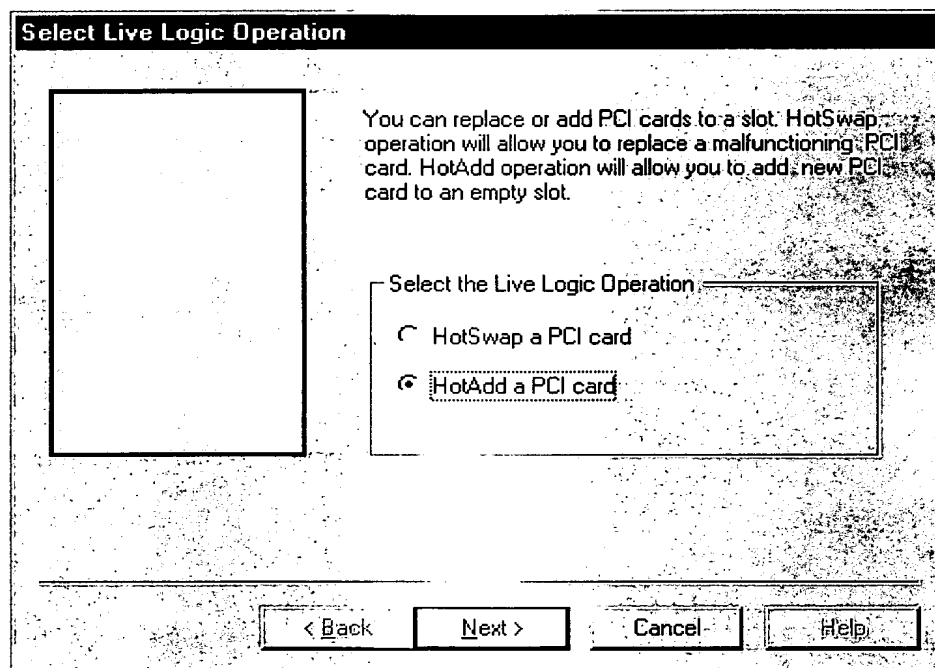


FIG. 27

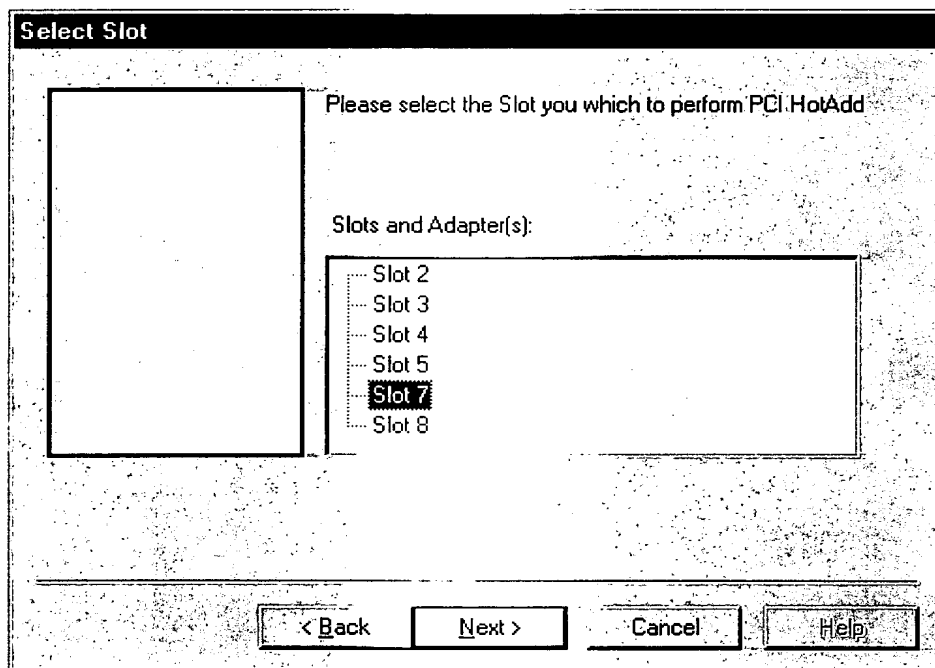


FIG. 28

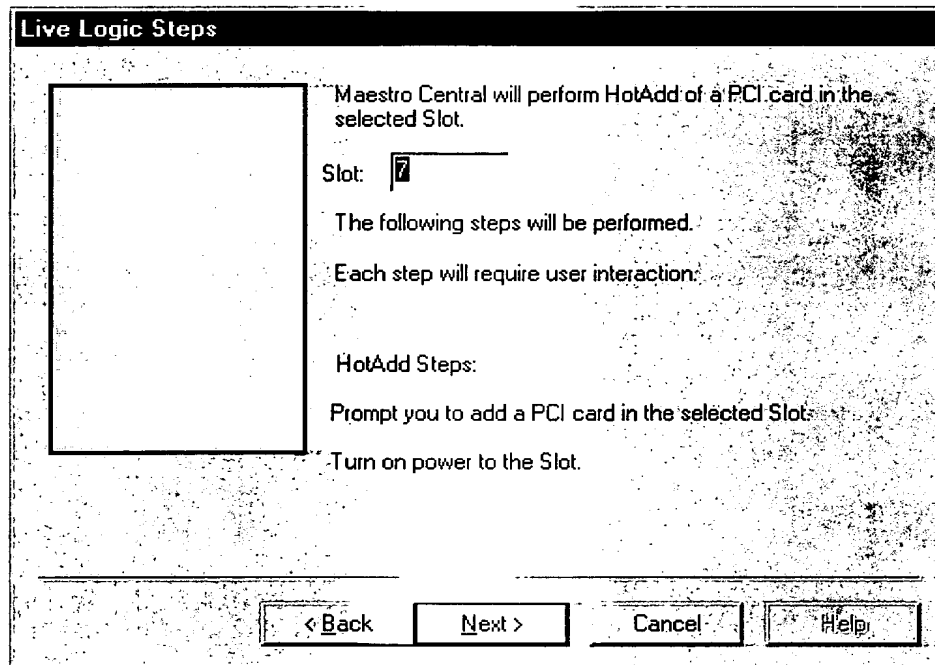


FIG. 29

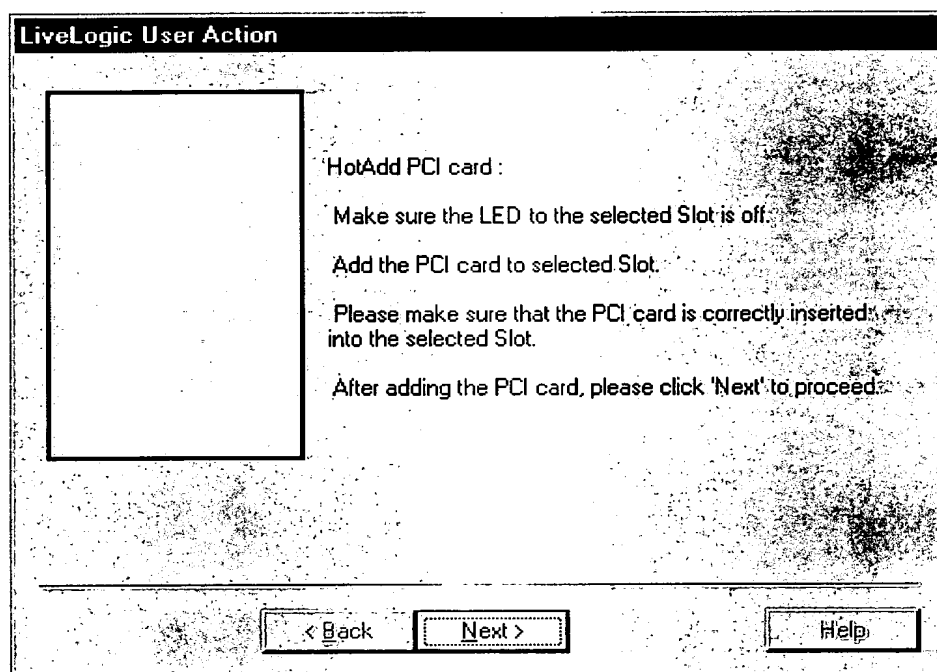


FIG. 30

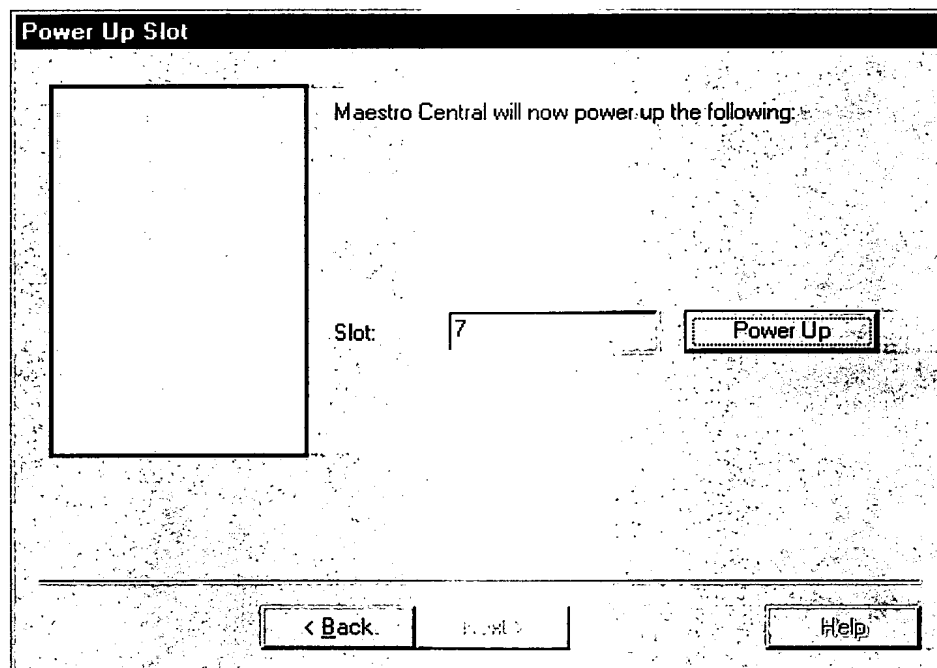


FIG. 31

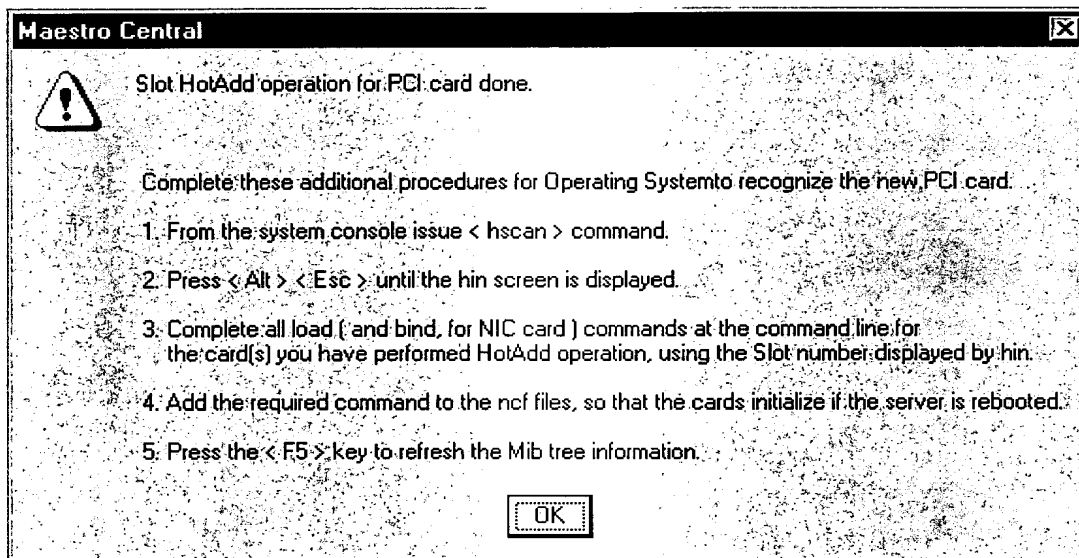


FIG. 32